

M1 CX 12


High Definition 2-way coaxial studio monitor

Ideal fields of application:

Control rooms Midfield listening

Surround channels for immersive audio (Auro 3D, Dolby Atmos, DTS-X)

LCR surround monitoring in small-to-medium control rooms

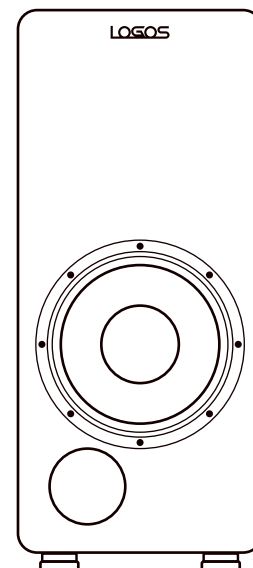

SPECIFICATIONS

Model	Logos M1 CX 12
Type	Active 2-way Coaxial midfield reference monitor
Drive Unit Complement	LF 305mm (12") Bass HF 45mm (1,75") Tweeter
Frequency Response	35Hz - 20kHz (- 3dB) (@1m full space, on-axis)
Input/Output Configuration	2 in / 2 out
Audio Input Connectivity	2 x Balanced analog input 2 x Unbalanced analog inputs Stereo Digital: AES-EBU (XLR) Supported ASRC: 44.1k ~ 216kHz
Audio Output Connectivity	1, speaker output: wire type; 2, Stereo Digital: AES-EBU (XLR)
Max continuous SPL	110dB @1m
Max Peak	SPL115dB @1m
Directivity	H +/-60 degrees V +50/-40 degrees (-6dB off axis @10kHz)
Network	RJ45 for use with web interface
Amplifier power per channel	LF 1 x 250W rms - HF 1 x 250W rms
Mains	AC 110/240V selectable
Cabinet dimensions Portrait	H82mm (32,2") W 37mm (14.5") D 37mm (14.5")
Weight	35kg (77lbs) each
Available Finishes	Black, Rosewood